

DUCHESNE COUNTY MONUMENT SURVEY RECORD


T1S R4W

 SEC 3 | SEC 2
 SEC 10 | SEC 11

U.S.B.&M.

V-17

LINE	BEARING	DISTANCE
L1	N 60°06'09" E	36.56'
L2	N 60°43'24" E	70.04'
L3	S 58°10'04" E	37.63'
L4	S 54°24'56" E	34.94'
L5	S 27°42'03" E	65.63'
L6	S 32°14'16" W	32.09'
L7	S 35°53'45" W	23.31'

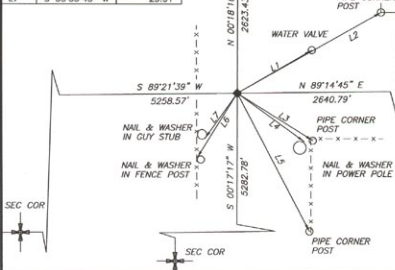

DESCRIPTION OF CORNER EVIDENCE FOUND

POSITION OF CORNER WAS DETERMINED BY RIGHT-OF-WAY FENCES

DESCRIPTION OF MONUMENT AND ACCESSORIES ESTABLISHED TO PERPETUATE THE ORIGINAL LOCATION OF THE CORNER

SET 5/8"X24" REBAR WITH 2 1/2" ALUMINUM COUNTY MONUMENT CAP, IN ASPHALT ROAD, STAMPED:

(REFERENCED AS SHOWN)



STATE PLANE COORDINATE DATA

CERTIFICATION

 I, Jerry D. Allred, Professional Land Surveyor, State of Utah, do hereby certify that I have performed or reviewed the work done on the diagrammed corner as reported on this recordation form and approve same

 Date 5 Jan '04

 Jerry D. Allred, Professional Land Surveyor
 Certificate No. 148951
 Duchesne County Surveyor


SCND 5 JAN 2004